


InterLock Desktop Housing

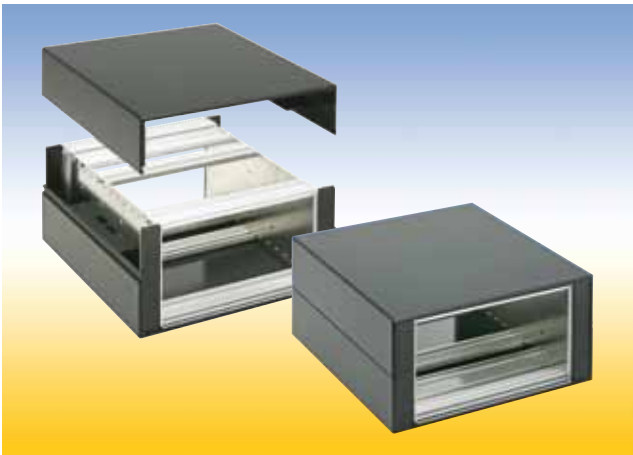

Description

The *InterLock* desktop housing has been designed to cover subracks. Also System-Module can be dressed up.

The special design features of the *InterLock* desktop housing:

- ✓ The covering elements are formed from recyclable polystyrene plate-material warmly and the joints are welded together by means of a chlorine carbon solution coldly.
- ✓ Material strength of 4 to 10 mm can be processed according to demand of the device.
- ✓ Easy assembly or disassembly of the case shells. Both case shells are locked by a clamp groove without screws.
- ✓ The case is upgradeable by feet and handles.
- ✓ However, on account of an economic manufacturing technology special dimensions or special colors can be also already realised for small quantities at a reasonable price.
- ✓ Extensive range of accessories is available.

Ordering details kit - *InterLock* desktop housing

nom. height [U]	width [HP]	nom. depth [mm]	order no. 409.
3	42	220	168 935
3	84	220	168 936
6	84	220	168 937

Accessories

Feet kit

order-no.: **409. 133 305**

Material: Polystyrene 6 mm thick

Color: black

Delivery:

The *InterLock* desktop housing is delivered in single parts.

Set consists of:

- 1 top-shell
- 1 bottom-shell

Ordering details for compatible subrack kits

	nom. height [HE]	width [HP]	PCB depth/ nom. depth [mm]	order no. 409.
Subrack <i>FLEXIBLE Fi-alpha</i> prepared for RFI	3	42	160/220	133 306
Subrack <i>FLEXIBLE Fi-alpha</i> prepared for RFI	3	84	160/220	133 307
Subrack <i>FLEXIBLE Fi-alpha</i> prepared for RFI	6	84	160/220	133 308